

# [ RubberShox Coil Gap Guide ]



0.75"

0.55"


0.51"

0.39"

0.31"

↑  
Not Compatible  
(Rubber Block Recommended)

COIL DIAMETER (G2)

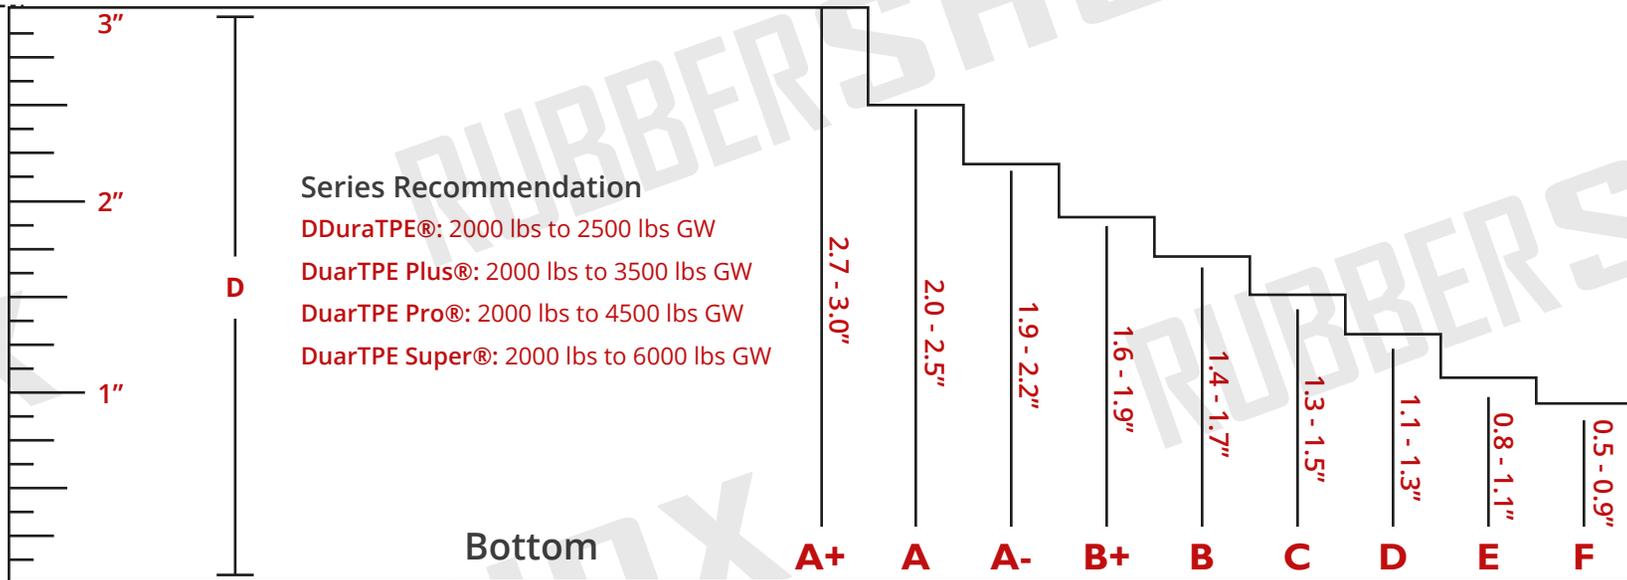

## Series Recommendation

DDuraTPE®: 2000 lbs to 2500 lbs GW

DuarTPE Plus®: 2000 lbs to 3500 lbs GW

DuarTPE Pro®: 2000 lbs to 4500 lbs GW

DuarTPE Super®: 2000 lbs to 6000 lbs GW

D = Coil Spring Gap (lifted)



To find the correct buffer size to fit your coil spring, please use the template provided above. Glue the template on thick board and cut out the step-ladder ruler. Place the bottom side of the template onto the coil and slide until you hit your mark. **(\*USE THE LARGEST GAP COIL MEASUREMENT TO DETERMINE YOUR BUFFER SIZE)**